

Güntner Info

GACC HFC

Aircooler Compact Cubic

1.3 – 84 kW



# Everything an aircooler requires

#### Power range

- 1.3 to 84 kW refrigerating capacity

#### Solid, stable casing

- Built with corrosion-resistant aluminium alloy
- Smooth surfaces
- Casing: powder-coated (RAL 9003)
- Stainless steel ceiling hanger

#### Installation-friendly

- Side cover with hinges
- Hinges allow hang-out
- Schrader valve on outlet
- Ceiling hanger with slotted hole
- Easily accessible with L-shape side cover

# SUNTHER SUNTHER

#### High application flexibility

- Suitable for normal and intensive cooling
- 4 or 7 mm fin spacing
- For the most diverse application areas and requirements

#### Corrosion protection

- With epoxy resin-coated fins\*



#### Reliable operation, easy cleaning

- No condensation water formation with thermally-decoupled tray
- Condensation water drain with  $^{3}\!/\!_{4}\text{``}$  and  $1^{1}\!/\!_{4}\text{``}$
- Easy access to all components
- Flap-open tray
- Flap-open heating sheet



#### Defrosting

- Electric coil and tray heating\*\*
- Empty tube for defrost sensor (contact tube)

#### Highly efficient heat exchanger

- Staggered tube pattern (50 x 25 mm)
- Internally ribbed special copper tubes
- Surface-corrugated aluminium fins
- Optimised for R404a refrigerant

#### Top quality fans

- Brand name manufacturer fans
- In acc. with new ErP Directive
- Motor protection with thermocontacts
- Motors for 50 or 60 Hz
- Speed-controlled with variable frequency drive and Phase-Cut

<sup>\*</sup> Available as option

<sup>\*\*</sup> to be installed and wired by customer, set for retrofitting available

# Compact in dimensions

Optimized casing dimensions for transport and storage

Stack-friendly cardboard packaging



## Compact model range

GACC 031	2,7 - 17,1 kW
GACC 040	6,5 - 37,2 kW
GACC 050	27,2 - 84,4 kW
GACC 031	1- 9 kW
GACC 040	2,6 - 18,1 kW
GACC 050	15,3 - 37,4 kW

Refrigerant	HFC
Variants	1 - 4 fans
Fan size;	315, 400, 500
diameter in mm	
Power range in kW	1.3 - 84
Air-throw range in m	up to 24
Air volume in m³/ h	up to 26,000
Dimensions (in mm) $(L \times W \times H)$	from $752 \times 430 \times 455$ to $4387 \times 623 \times 755$
Weight in kg	20 - 296
Quality standard	ISO 9001

# Certification for guaranteed performance

As a member of the Eurovent Certification Programme we guarantee you our products' performance. As part of the certification all series of a participating manufacturer are tested and confirmed by specially approved laboratories. With units with the Eurovent certification seal of approval you can be assured that the specified capacity values are actually achieved.



# Quick delivery with units in storage


When searching for units, the GPC calculation software shows which ones are in storage, and therefore can be delivered in just 4 days. These units have the storage symbol.

#### Available as storage units:

Evaporators: GDF, DHF, GHF, GACC Condensers: GVM, GVH, GVV, GVVX, GVHX

#### In-house logistics department

Rapid availability and reliable delivery are the be-all and end-all of customer satisfaction. We have our own in-house logistics department to optimally meet our customers' requirements in this respect, with which we can provide rapid and reliable delivery.

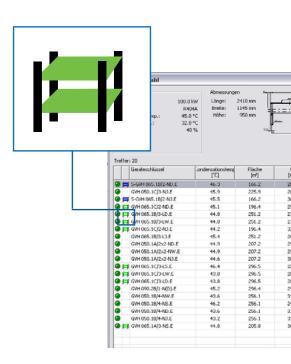



# High demand – reliable products

Güntner only uses the high-grade materials of certified manufacturers in producing their heat exchangers. These are processed on modern machinery into high-quality and optically appealing products.

In addition to cost-effectiveness, safety of staff and environmental protection are also high priority Güntner corporate

#### Stable soldered connections



- Prevent leaks
- Modern production technology with friction melting process (deform instead of drilling)
- Increased pressure stability

#### Powder coating




- All Güntner evaporators are powder-coated.
- Special paint coats are possible.

#### Brandname fans



Only the fans of renowned manufacturers are used at Güntner. Güntner has partnerships with hese manufacturers to further develop the respective fans.

#### Highly efficient cooler



Highly efficient, fail-safe Güntner coolers have high cooling power. The coolers are equipped for this with a staggered tube system, internally grooved tubes and special fin geometries.

#### **Tests**

Güntner heat exchangers are continuously tested and certified by independent institutions:



# Quickly and safely configure thermodynamically & generate quotes

The Güntner Product Calculator GPC configuration software allows you to quickly configure the right unit for your application. Simply enter the required basic data in the entry screen on the GPC. An exact thermodynamic configuration then follows.

Use our software for selecting evaporators, condensers, aircoolers, drycoolers, control units and switch cabinets!

#### **Download your**

Güntner Product Calculator (GPC) for free. www.guentner.eu



Numerous functions for quick and precise configuration from series selection to options, through to control:





#### Your benefits at a glance:

- Precise thermodynamic configuration
- Quick and safe configuration
- Different units possible
- 15 languages can be set
- Current prices and delivery times can be called up
- Display of quickly delivered units in storage



the finisher Austr Spiner Spide ?



### Our expertise is your advantage!

#### Application advice

on straight away.

Our specialists are your contact partners waiting to help you. They will advise you in detail and configure the best unit for your application case in accordance with your requirements, or develop a complete concept for a ready-to-operate soluti-



#### Fans

We use high efficiency, directly-driven, brand name fans for continuous control, balanced in two planes. With balancing



quality Q 6.3 they comply with DIN ISO 1940 Part 1. The fans are maintenance-free and extremely long-life.

#### Leak-safety


The proven Güntner floating coil system relieves the fluid-carrying heat exchanger tubes, without any contact with enclosu-



re parts (end plate/separator plate). The heat exchanger is on a floating bearing, and is therefore protected against leaks.

#### Sound

The extensive test runs in our internal test laboratory enable the optimum fans to be selected for the sound requirements



of your application - starting with configuration with the Güntner Product Calculator.

#### Control

Güntner Controls is an independent department which has been delivering efficient and top quality controllers and



switch cabinets for many years now. Our experts work out project-specific solutions for you for the highest demands in all areas. We have an individual switch cabinet solution for all your applications - regardless of whether it involves AC or EC fans. We control everything!

#### Service After Sales

Our Service After Sales department supports our customers with problems and questions they may have. If there are any



doubts at all, a colleague is quickly on-site to take care of your issues and interests directly there with you. Our employees are not only refrigeration technology experts - they are also qualified in many other specific areas, e.g. as certified welders for different tube wall strengths and materials.

If interested, please contact our Sales department: sales@guentner.de

